

**COMPLETE
LED LIGHTING
SOLUTION**



**ALL TYPE OF LED LIGHTS
MANUFACTURER**



SONSHIV INDUSTRIES PRIVATE LIMITED



SCAN FOR MORE!



 info@sonshiv.in

 www.sonshiv.com



DIAMOND FLOOD LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

DIAMOND FLOOD LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

30W
50W
100W
150W
200W
300W

Light Temperature





IGNIX FLOOD LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

IGNIX FLOOD LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

30W
50W
100W
150W
200W
400W

Light Temperature

6K 4K 3K



HIGH-MAST FLOOD LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

HIGH-MAST FLOOD LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

50W	300W
100W	400W
150W	600W
200W	800W
250W	1000W

Light Temperature






HIGH MAST LIGHT/STADIUM LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

HIGH MAST LIGHT/STADIUM LIGHT

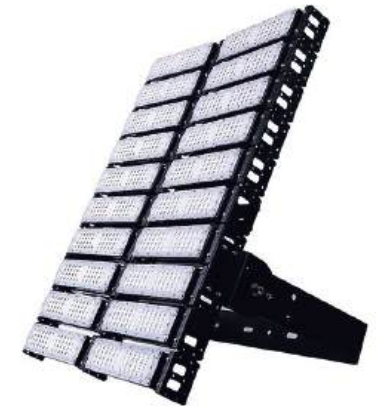

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

400W
800W
1000W
1200W
1600W

Light Temperature

6K

4K

3K



HIGH BAY LIGHT

- Hanging High-Bay Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

HIGH BAY LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance

Wattage

50W
100W
150W
200W
300W

Light Temperature

6K

4K

3K



STREET LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

STREET LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

30W
50W
80W
100W
150W
200W

Light Temperature

6K 4K 3K



HIGH WATTAGE STREET LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

HIGH WATTAGE STREET LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

200W
250W
300W
400W
500W

Light Temperature

6K

4K

3K



STREET LIGHT (LUMORIX)

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

STREET LIGHT (LUMORIX)



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

50W
100W

Light Temperature

6K

4K

3K



SENSOR STREET LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

SENSOR STREET LIGHT



SENSOR

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

50W
80W
100W

Light Temperature

6K 4K 3K



SOLAR STREET LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

SOLAR STREET LIGHT



- LED TYPE : HIGH POWER SMD LED_s
- LUMEN ≥ 120 LM/W
- CRI >80LED
- Life 50000 Burning Hours
- IP65/ IP66 (WATER PROOF)
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

9W	40W
12W	45W
15W	50W
18W	60W
24W	70W
36W	

Light Temperature

6K

4K



SOLAR STREET LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

SOLAR STREET LIGHT ALL IN ONE



- LED TYPE : HIGH POWER SMD LED_s
- LUMEN ≥ 120 LM/W
- CRI >80LED
- Life 50000 Burning Hours
- IP65/ IP66 (WATER PROOF)
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

9W	40W
12W	45W
15W	50W
18W	60W
24W	70W
36W	

Light Temperature

6K

4K



COMMERCIAL PANEL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

COMMERCIAL PANEL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

24W
30W
36W
48W
72W

SIZE (ft)

1×1
2×2

Light Temperature

6K

4K


3K



COMMERCIAL PANEL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

COMMERCIAL PANEL LIGHT

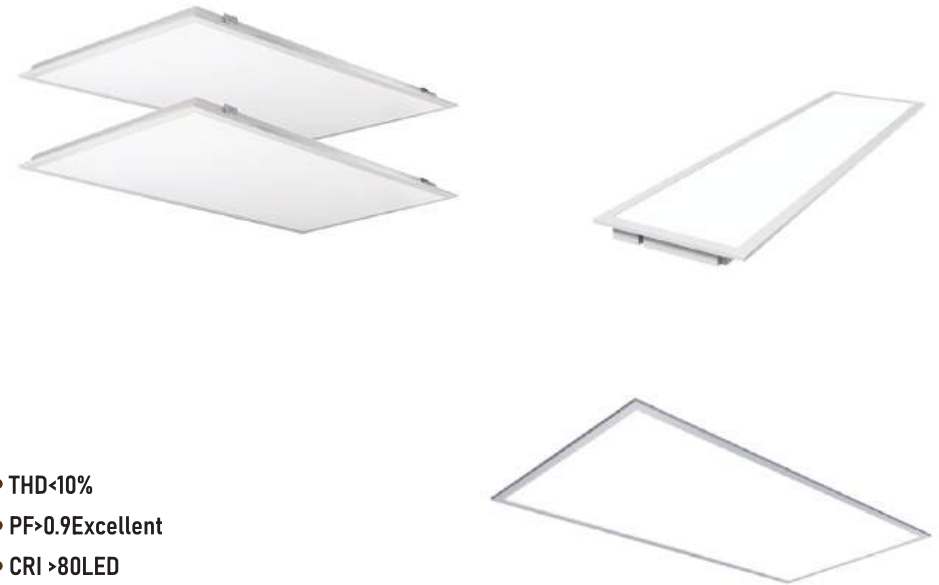

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

48W
72W
100W

SIZE (ft)

1×4
2×4

Light Temperature

6K

4K

3K



PANEL LIGHT (ROUND)

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

PANEL LIGHT (ROUND)



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

6W
8W
12W
15W
18W
22W

BODY TYPE

PC
ALUMINIUM

Light Temperature

6K 4K 3K 3 IN 1



PANEL LIGHT (SQUARE)

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

PANEL LIGHT (SQUARE)



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

8W
12W
15W
18W
22W

BODY TYPE

PC
ALUMINIUM

Light Temperature

6K

4K

3K

3 IN 1



ADJUSTABLE PANEL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

ADJUSTABLE PANEL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

12W
15W
18W

Light Temperature

6K

4K

3K



CONCEALED LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

CONCEALED LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

6W
7W
9W
12W

Light Temperature





DEEP LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

DEEP LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

3W

Light Temperature





STRICKER & SPOT LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

STRICKER & SPOT LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

2W
3W

Light Temperature

6K

4K

3K



LED TUBE LIGHT

- Surface Rimless Light • Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

LED TUBE LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

10W	120°
18W	120°
20W	120°
22W	120°
36W	120°
40W	120°

Light Temperature





HUMAN BODY INDUCTION

SENSOR TUBE LIGHT

- Surface Rimless Light • Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

SENSOR TUBE LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

18W	120°
20W	120°
22W	120°
36W	120°
40W	120°

Light Temperature

6K

4K



BULK HEAD LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

BULK HEAD LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

10W
20W

Body Type

PC
ALUMINIUM

Light Temperature

6K

4K

3K

LONG LIFE
HIGH BRIGHTNESS



HIGH WATTAGE BULB

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

HIGH WATTAGE BULB



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

30W
40W
50W

Light Temperature

6K

4K

3K

ENERGY SAVING
HIGH BRIGHTNESS
MULTI COLOUR



LED BULB

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

LED BULB



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

0.5W	12W
7W	15W
9W	18W
10W	24W

Light Temperature





TRACK/ WALL TRACK

- Surface COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

TRACK/ WALL TRACK



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V AC/50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

12W	38°
20W	38°
30W	38°
40W	
50W	
60W	

Light Temperature

6K

4K

3K



TRACK ACCESSORIES

- Track Light Fitting ● Track Joints
- Aluminium Track Channel ● PC Jointer with Copper Connectors

TRACK ACCESSORIES



- Track / Patti: Long metal channel with internal copper conductors.
- Track Lights (Fixtures): LED Tracklight attached to the track.
- End Connector: Closes the open end of the track.
- Power Connector: Supplies electricity to the track.
- Joiners (Straight, L, T, X): Used to extend or change direction of the track.



GATE LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

GATE LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Light Temperature

6K

4K

3K



BOLLARD LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

BOLLARD LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.



Light Temperature





SPIKE / GARDEN LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

SPIKE / GARDEN LIGHT




- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

5W
7W
12W

Light Temperature



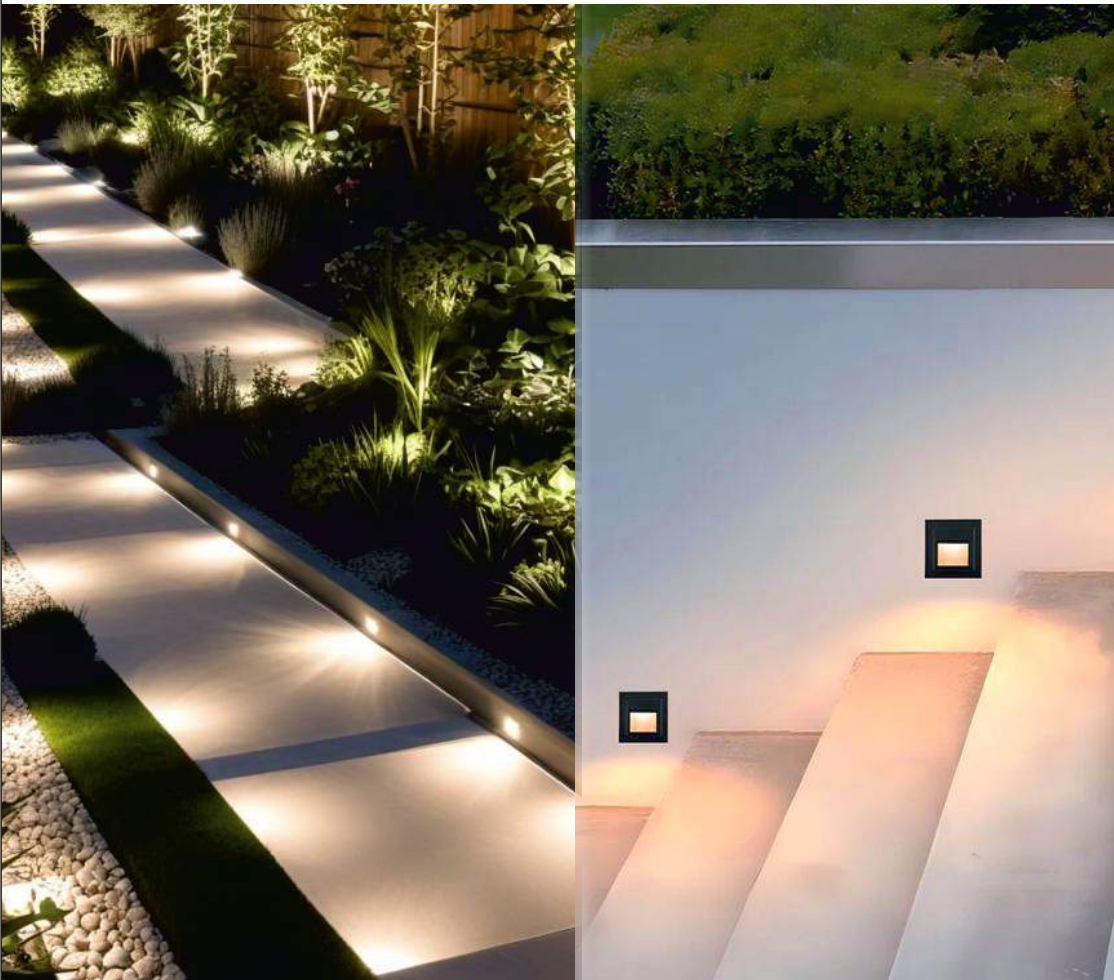

FOOT LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

FOOT LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

3W
5W

Light Temperature

6K

4K

3K



IN GROUND LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

IN GROUND LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

0.5W	12W
7W	15W
9W	18W
10W	24W

Light Temperature





FOUNTAIN LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

FOUNTAIN LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

WATTAGE

6W

Light Temperature

6K

4K

3K



ROPE LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

ROPE LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Light Temperature





STRIP LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

STRIP LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

AVAILABLE

60 LED
120 LED
240 LED

Light Temperature





COB DELTA LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

COB DELTA LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage 85V 380V AC. / 50Hz
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
12W	38°
18W	38°

Light Temperature





SWSWELL CURVE HEAT COB LIGHT

- Recess COB Spot Light • CNC Crafted Aluminium Fixture
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

SWSWELL CURVE HEAT COB LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Vollage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
12W	38°

Light Temperature





RIO LOW DEEP COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

RIO LOW DEEP COB LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

12W

38°

Light Temperature

6K

4K

3K

31N1



NOVA PLUS LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

NOVA PLUS LIGHT



- THD 10%
- PF>0.9Excellet
- CRI S80LED
- Lite 50000 Burning Hours
- Operating Voltage 85V 380V AC / 50Hz.
- Irstand. Start and Energy Efficient light Source
- High quality COB/LED technology unsures superior light distribution and enhanced Illumination
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

7W

38°

12W

38°

18W

38°


Light Temperature

6K

4K

3K

31N1

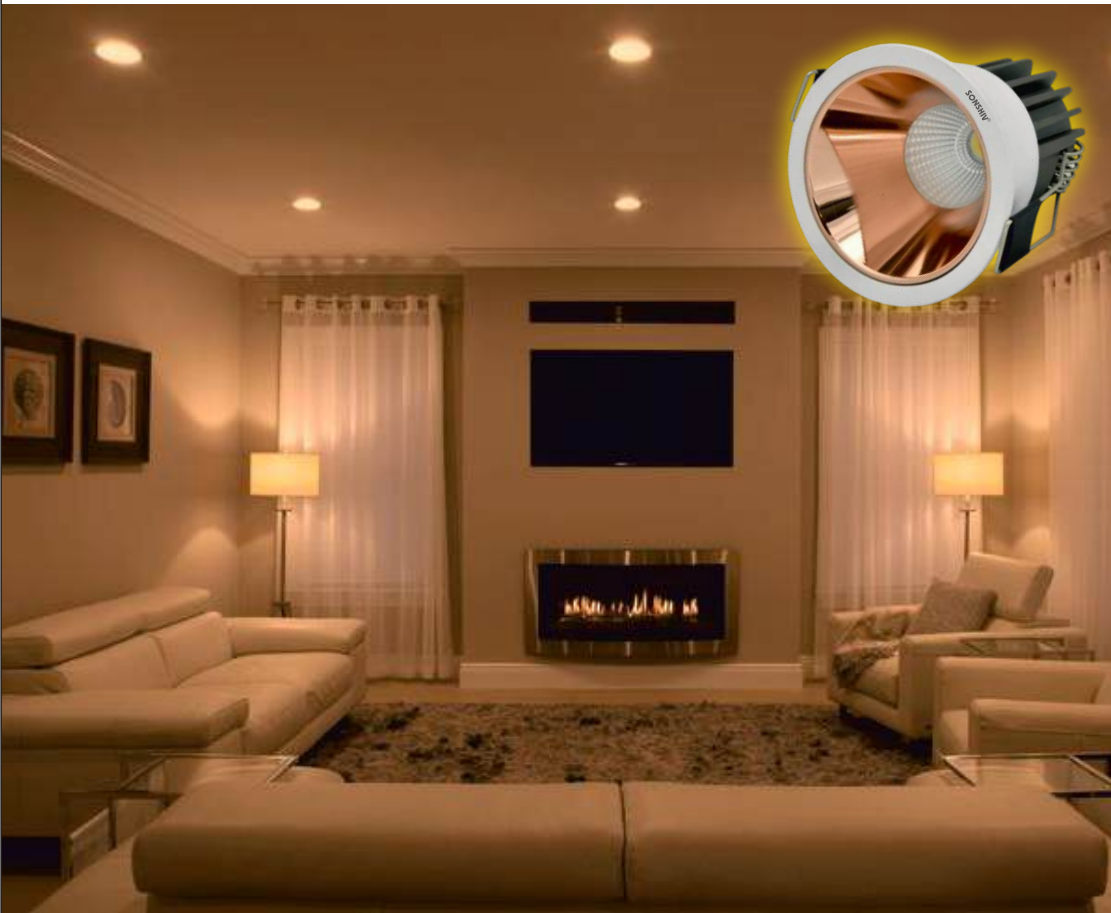

DELTA COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

DELTA COB LIGHT



- THD 10%
- PF>0.9Excellet
- CRI S80LED
- Lite 50000 Burning Hours
- Operating Voltage 85V 380V AC / 50Hz.
- Irstand. Start and Energy Efficient light Source
- High quality COB/LED technology unsures superior light distribution and enhanced Illumination
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

7W

38°

12W

38°

18W

38°

Light Temperature

6K

4K

3K

31N1



IGNITE LENS COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Imported Fixture.
- High-Grade / Anti-Glare. Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

IGNITE LENS COB LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage B5V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

3W	38°
7W	38°
12W	38°
18W	38°


Light Temperature

6K

4K

3K

31N1

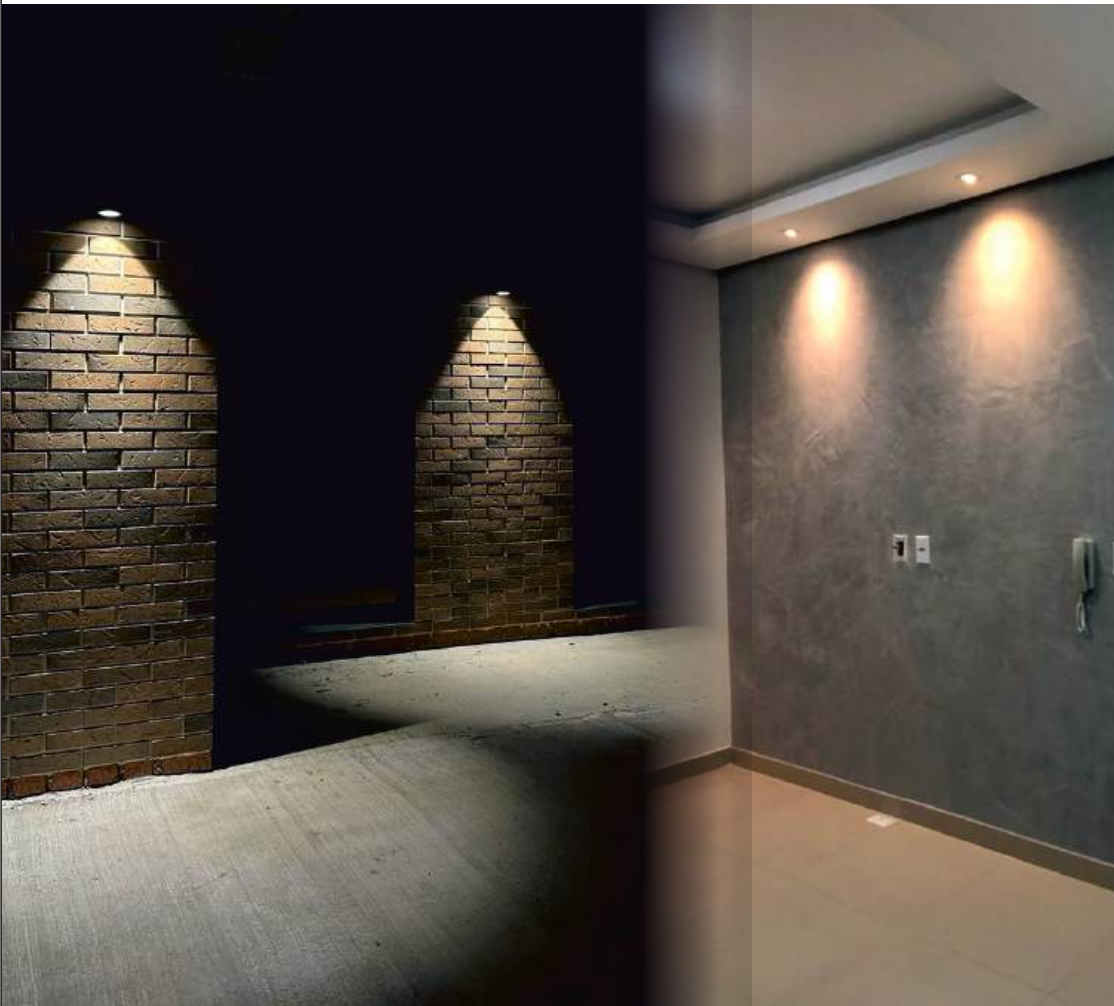

WALL WASHER COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Imported Fixture.
- High-Grade / Anti-Glare. Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

WALL WASHER COB LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

12W
18W

Beam Angle

38°
38°

Light Temperature

6K

4K

3K



MOVEABLE COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

MOVEABLE COB LIGHT



THD<10%
PF>0.9Excellent
CRI >80LED
Life 50000 Burning Hours
Operating Voltage 85V 380V. AC. / 50Hz.
Instant Start and Energy Efficient light Source.
High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

24W	60°
30W	60°
50W	60°
60W	60°

Light Temperature

6K 4K 3K 31N1



RAINPROOF COB LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Imported Fixture.
- High-Grade / Anti-Glare. Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

RAINPROOF COB LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance,

Wattage	Beam Angle
12W	38°
18W	38°
20W	38°
50W	38°

Light Temperature

6K

4K

3K

31N1



LEXUS PRO SERIES

- Recess LED Down Light ● Die Cast Aluminium Fixture
- High-Grade / Electro-plated Reflector ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

LEXUS PRO SERIES



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

12W	120°
18W	120°
24W	120°

Light Temperature

6K

4K

3K

31N1



GRACE PANEL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

GRACE PANEL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
12W	38°
18W	38°
24W	38°

Light Temperature





CURVE SPOT LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

CURVE SPOT LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
12W	38°
18W	38°
30W	38°

Light Temperature

6K

4K

3K



COB SPOT LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

COB SPOT LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
3W	38°
3W	38°
3W	38°

Light Temperature





DEL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

DEL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

7W
12W
18W

Beam Angle

38°
38°
38°

Light Temperature

6K

4K

3K



LEXUX DOWN LIGHT

- Surface COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

LEXUX DOWN LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

12W
18W
24W

120°
120°
120°

Light Temperature

6K

4K

3K

31N1



ALICE PC SURFACE

- Surface Rimless Light • Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

ALICE PC SURFACE



- THD<10%
- PF>0.9Excellent
- CRI >BOLED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AG. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced Illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
10W	120°
15W	120°
20W	120°

Light Temperature





ZOOM ROUND COB

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

ZOOM ROUND COB



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage: 85V 380V. AC/50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance

Wattage

Beam Angle

15W	38°
24W	38°
20W	60°
30W	60°
50W	60°

Light Temperature

6K 4K 3K 31N1



HONEY COB PULLOUT LIGHT

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

HONEY COB PULLOUT LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
7W	38°
14W	38°
12W	38°
12W	38°

Light Temperature





360° SURFACE CYLINDER

- Recess COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

360° SURFACE CYLINDER



- THD 10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced Illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

7W

Beam Angle

38°

Light Temperature

6K

4K

3K

31N1



SURFACE CYLINDER LIGHT

- Surface COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

SURFACE CYLINDER LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
12W	38°
18W	38°

Light Temperature





Black Ceiling



White Ceiling

ORASURFACE MOVEABLE CYLINDER

- Surface COB Spot Light • Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

ORASURFACE MOVEABLE CYLINDER



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

7W
12W
18W

Beam Angle

38°
38°
38°

Light Temperature

6K

4K

3K

31N1



CRETA MOVEABLE CYLINDER

- Surface COB Spot Light ● Die Cast Aluminium Fixture.
- High-Grade / Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection
- Brighter & Wider Light ● Premium Finish

CRETA MOVEABLE CYLINDER



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

7W
12W
18W

Beam Angle

38°
38°
38°

Light Temperature

6K

4K

3K

31N1



FUSION REFLECTOR LIGHT

- Recess SMD Linear Light ● Die Cast Aluminium Fixture.
- High-Grade Anti-Glare Diffuser ● Well Equipped Driver with Surge Protection.
- Brighter & Wider Light ● Premium Finish

FUSION REFLECTOR LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage: 85V 380V. AC/50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle

8W	38°
12W	38°
24W	38°

Light Temperature

6K 4K 3K 31N1




Honeycomb Anti-Glare
Double Head Main Lighting
Deep Light Source Precise Light Control
Honeycomb Mesh

ORNATE SQUARE COB LIGHT

- Recess COB Spot Light • CNC Crafted Aluminium Fixture
- High-Grade / Anti-Glare Diffuser • Well Equipped Driver with Surge Protection
- Brighter & Wider Light • Premium Finish

ORNATE SQUARE COB LIGHT

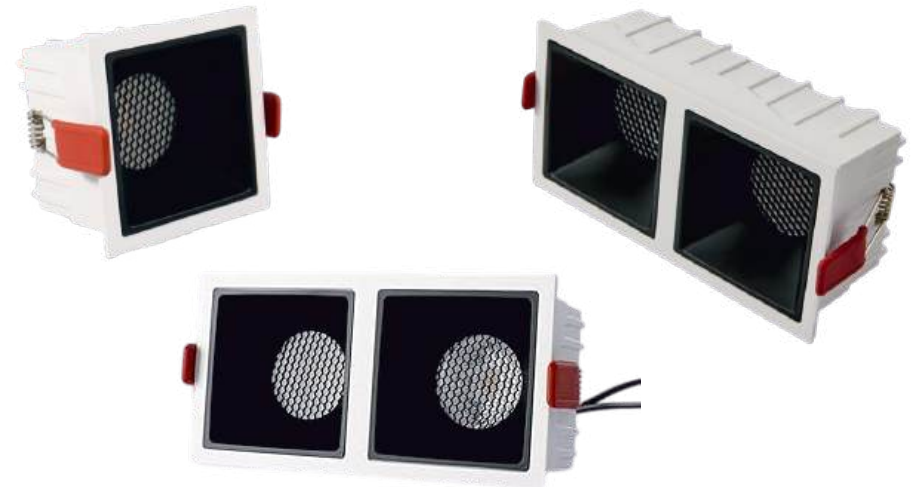

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life: 50000 Burning Hours
- Operating Voltage: 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality COB / LED technology ensures superior light distribution and enhanced illumination.
- The aluminum die-cast housing is designed with efficient passive cooling for optimal performance.

Wattage	Beam Angle
7W	38°
12W	38°
14W	38°
24W	38°

Light Temperature

6K	4K	3K	31N1
----	----	----	------



TRUMP COB (SQUARE)

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

TRUMP COB (SQUARE)



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

12W
24W

Beam Angle

38°
38°

Light Temperature

6K

4K

3K



MEGA SURFACE CYLINDER

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

MEGA SURFACE CYLINDER



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

Beam Angle


12W

Light Temperature

6K

4K

3K

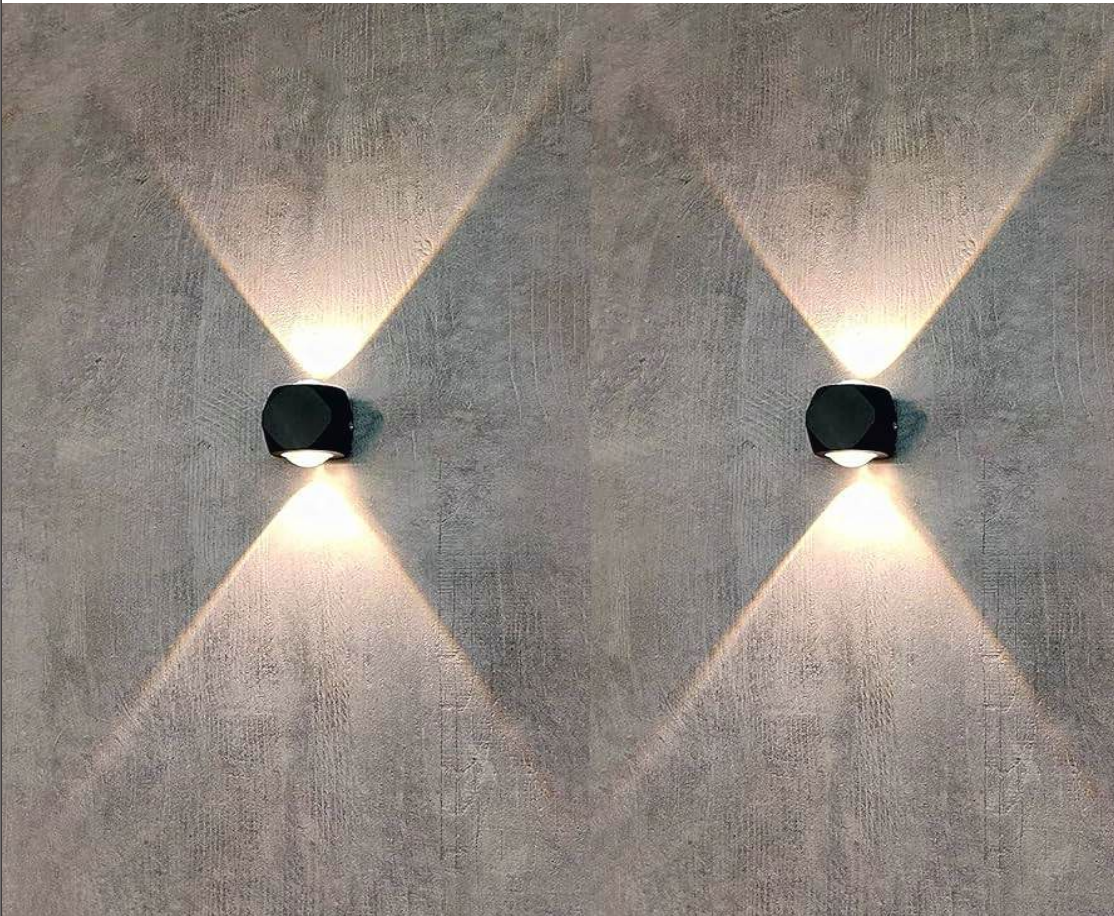

BALL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

BALL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

2W
4W
8W

Light Temperature

6K 4K 3K



CURVE 3+3 (WALL LIGHT)

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

CURVE 3+3 (WALL LIGHT)



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

Available

2W
4W
6W

1+1 CURVE
2+2 CURVE

Light Temperature

6K

4K

3K



FULL-K + HALF-K LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

FULL-K + HALF-K LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

3W
6W

Light Temperature

6K

4K

3K



BUTTERFLY WALL LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

BUTTERFLY WALL LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

6W

Light Temperature

6K

4K


3K



LINEAR HANGING PROFILE LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

LINEAR HANGING PROFILE LIGHT

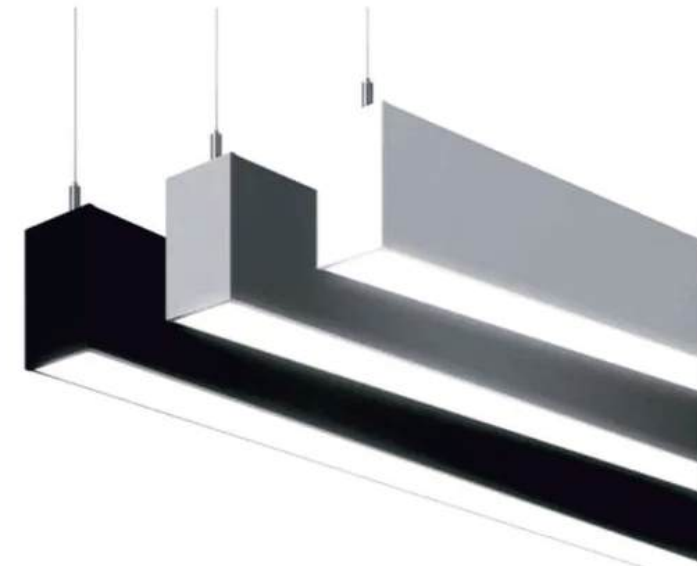

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

36W
54W
72W
108W

Light Temperature

6K 4K 3K



DRUM HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

DRUM HANGING LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.

Wattage

24W
30W
36W
60W
72W

Light Temperature

6K 4K 3K



RING/DONUT HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

RING/DONUT HANGING LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.
- LED Temperature Available in 6000k / 4000k/ 3000k/3in1 / Smart CCT Tunable & Dimmable

Wattage

24W
30W
36W
60W
72W

Light Temperature

6K 4K 3K



HEXA LINEAR HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

HEXA LINEAR HANGING LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.
- LED Temperature Available in 6000k / 4000k/ 3000k/3in1 / Smart CCT Tunable & Dimmable

Wattage

24W
30W
36W
60W
72W

Light Temperature


6K 4K 3K



TRI/TRIDRUM HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

TRI/TRIDRUM HANGING LIGHT

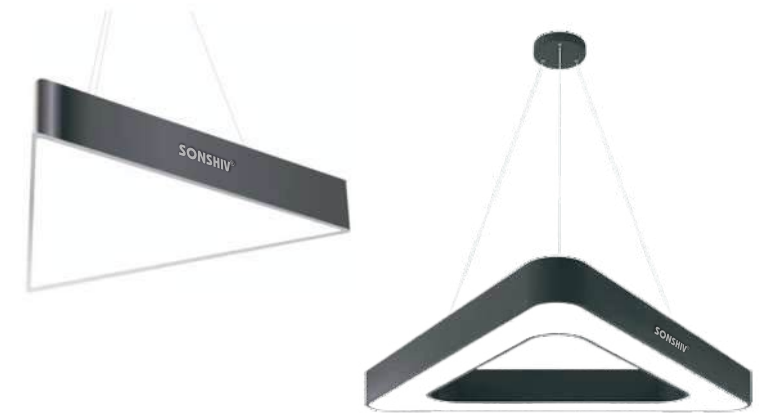

- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.
- LED Temperature Available in 6000k / 4000k/ 3000k/3in1 / Smart CCT Tunable & Dimmable

Wattage

24W
30W
36W
60W
72W

Light Temperature

6K 4K 3K



Y-SHAPE HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

Y-SHAPE HANGING LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.
- LED Temperature Available in 6000k / 4000k/ 3000k/3in1 / Smart CCT Tunable & Dimmable

Wattage

24W
30W
36W
60W
72W

Light Temperature

6K 4K 3K



SQUARE/RECTANGLE HANGING LIGHT

- High-Grade / Anti-Glare Diffuser
- Well Equipped Driver with Surge Protection
- Brighter & Wider Light
- Premium Finish

SQUARE/RECTANGLE HANGING LIGHT



- THD<10%
- PF>0.9Excellent
- CRI >80LED
- Life 50000 Burning Hours
- Operating Voltage 85V 380V. AC. / 50Hz.
- Instant Start and Energy Efficient light Source.
- High-quality LED technology ensures superior light distribution and enhanced illumination.
- The housing is designed with efficient passive cooling for optimal performance.
- LED Temperature Available in 6000k / 4000k/ 3000k/3in1 / Smart CCT Tunable & Dimmable

Wattage

24W
30W
36W
60W
72W

Light Temperature

6K 4K 3K

